


**PLAN VIEW**

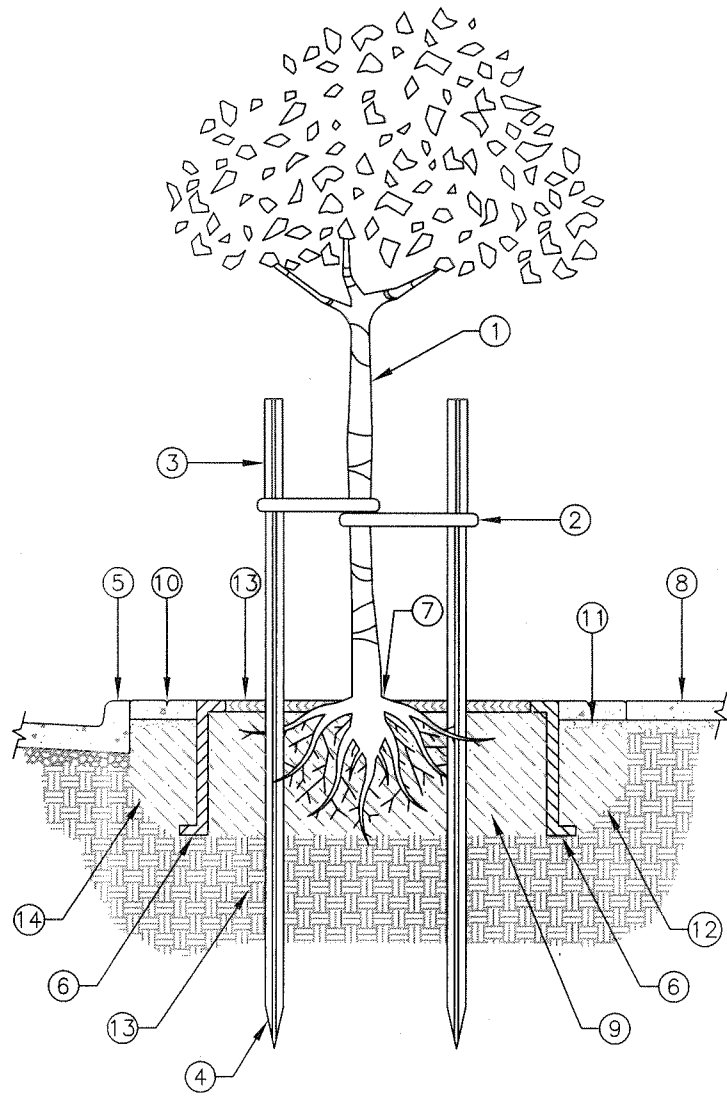

**SECTION VIEW**

**NOTES:**

- ① TREE AS PER C.D.F. STANDARDS FOR PURCHASING CONTAINER GROWN LANDSCAPE TREES.
- ② 3/4" WIDE REINFORCED PLASTIC GREEN TREE TIE.
- ③ 8' HEAVY DUTY STEEL T-POST. PLACE POSTS PERPENDICULAR TO PREVAILING WINDS AND OUTSIDE ROOTBALL IN UNDISTURBED NATIVE SOIL.
- ④ DRIVE POST 1' MIN INTO UNDISTURBED SOIL. PLACE POSTS MINIMUM 18" AWAY FROM TRUNK.
- ⑤ CURB AND GUTTER OR OTHER PAVING.
- ⑥ ROOT CONTROL BARRIER BY "DEEP ROOT CORP." OR APPROVED EQUAL. SET AT LEVEL OF SURROUNDING CEMENT OR SOIL. 10' LONG CENTERED ON TREE, 18" DEPTH (LB 18-2) ALONG CURBING.
- ⑦ FIRST ROOTS SHALL BE VISIBLE AT TOP OF ROOTBALL. SET TOP OF ROOTBALL 1" ABOVE FINISH GRADE TO ALLOW FOR SETTLEMENT. BREAK UP SIDES OF BALL AND SPREAD OUT ROOTS. NO CIRCLING ROOTS SHALL REMAIN WITHIN 12" OF THE TREE TRUNK.
- ⑧ SIDEWALK.
- ⑨ BACKFILL MIX PER SPECIFICATIONS OR SOIL REPORT. SOIL SHALL BE 2" BELOW WALK. COVER SOIL WITH 2" OF MULCH TO GRADE.
- ⑩ STAMPED CONCRETE, PER SPEC'S.
- ⑪ 2" SAND BASE.
- ⑫ PLANTING HOLE SHALL BE TWICE THE DIAMETER OF THE ROOTBALL AND NO DEEPER THAN THE TREE ROOTBALL. SCARIFY SIDES AND BOTTOM OF HOLE. IN PARKING AREAS OVER EXCAVATION OF COMPACTED SOIL MAY BE REQUIRED.
- ⑬ MULCH.

REVISION	BY	DATE	APP. BY COUNCIL

<b>CITY OF CHICO</b>		<b>STANDARD PLAN</b>	
DRAWN BY: <u>GL</u>	DATE: <u>9/09</u>	<b>FIFTEEN GALLON TREE PLANTING DETAIL WITH STAMPED CONCRETE</b>	NO. <b>LS-2</b>
CHECKED BY: <u>DB</u>	SCALE: <u>NONE</u>		
APPROVED:	CPSD DIRECTOR		
		SHEET 1 OF 1	