


SECTION VIEW

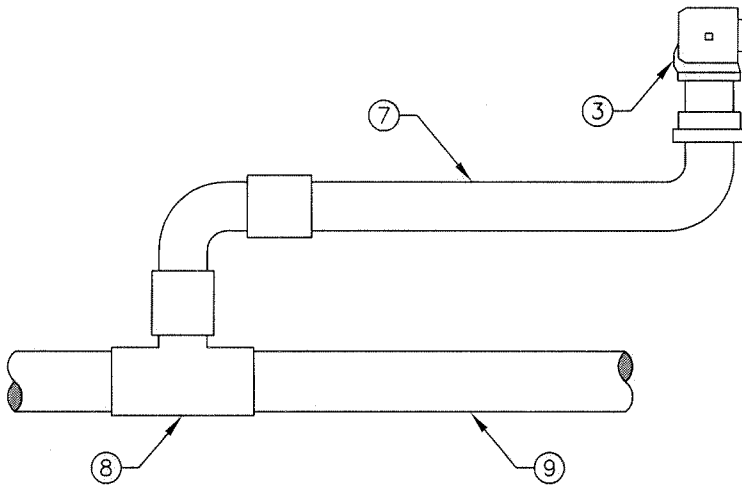

PLAN VIEW

NOTES:

- ① FINISH GRADE.
- ② SET TOP OF BOX ABOVE FINISH GRADE: 1" IN SOD, 2" IN PLANTER OR DECOMPOSED GRANITE.
- ③ QUICK COUPLING VALVE WITH LOCKING RUBBER COVER, RAINBIRD 44-LRC OR APPROVED EQUAL.
- ④ SET QUICK COUPLER 12" FROM EDGE OF PLANTING AREA.
- ⑤ CURB, HEADER OR PAVING.
- ⑥ PLASTIC VALVE BOX WITH QUICK COUPLER VALVE, CARSON 910 OR APPROVED EQUAL.
- ⑦ MANUFACTURED TRIPLE SWING JOINT, KBI SPIGOT X SOCKET, OR EQUAL.
- ⑧ SCHEDULE 40 PVC TEE (SXSXS).
- ⑨ SCHEDULE 40 OR CLASS 315 PVC MAINLINE; 24" MINIMUM COVER.
- ⑩ PEA GRAVEL, 6" DEPTH.
- ⑪ 1/4" GALVANIZED WIRE CLOTH PLACED ABOVE GRAVEL.
- ⑫ PREPARED SUBGRADE.
- ⑬ (3) COMMON BRICKS FOR SUPPORT.
- ⑭ NIPPLE, T.O.E.
- ⑮ USE MINIMUM 3 WRAPS OF TEFLON TAPE AT EACH THREADED CONNECTION.

REVISION	BY	DATE	APP. BY COUNCIL

CITY OF CHICO

STANDARD PLAN

DRAWN BY: GL DATE: 10/06
 CHECKED BY: DB SCALE: NONE
 APPROVED: [Signature]
 DIRECTOR OF ENGINEERING

QUICK COUPLING VALVE

NO.
LS-10

SHEET 1 OF 1