NOTES:

1. EDGE OF PAVING OR FACE OF WALL. NARROW OR IRREGULAR SHAPED AREAS, INCLUDING TURF, LESS THAN 8 FEET IN WIDTH IN ANY DIRECTION SHALL BE IRRIGATED WITH SUBSURFACE OR LOW VOLUME IRRIGATION SYSTEM.
2. FINISH GRADE.
3. SET TOP OF SPRINKLER AT FINISH GRADE OF CONCRETE AND ABOVE SOIL GRADE; ½" TO ¾" IN SOD, 2" IN PLANTER, DECOMPOSED GRANITE OR MULCH. TOP OF SPRINKLER SHALL BE LEVEL WITH TOP OF PAVING. IF A BUBBLER IS USED, TOP OF BUBBLER SHALL BE LEVEL WITH TOP OF PAVING.
4. POP-UP SPRAY HEAD.
5. SCHEDULE 80 RISER, LENGTH AS REQUIRED.
6. DOUBLE SWING JOINT; SCHEDULE 40 PVC STREET ELBOW, SCHEDULE 40 PVC ELBOW T x T.
7. SCHEDULE 80 NIPPLE LENGTH AS REQUIRED.
8. SCHEDULE 40 PVC STREET ELBOW.
9. TEE OR ELBOW SCHEDULE 40.
10. LATERAL LINE SCHEDULE 40.
11. NATIVE SOIL BACKFILL, FREE OF ROCKS LARGER THAN 1".
12. OVERHEAD IRRIGATION SHALL NOT BE PERMITTED WITHIN 24 INCHES OF A NON PERMEABLE SURFACE.
13. IF AREA TO BE PLANTED. PROVIDE 2 DRIPLINES.

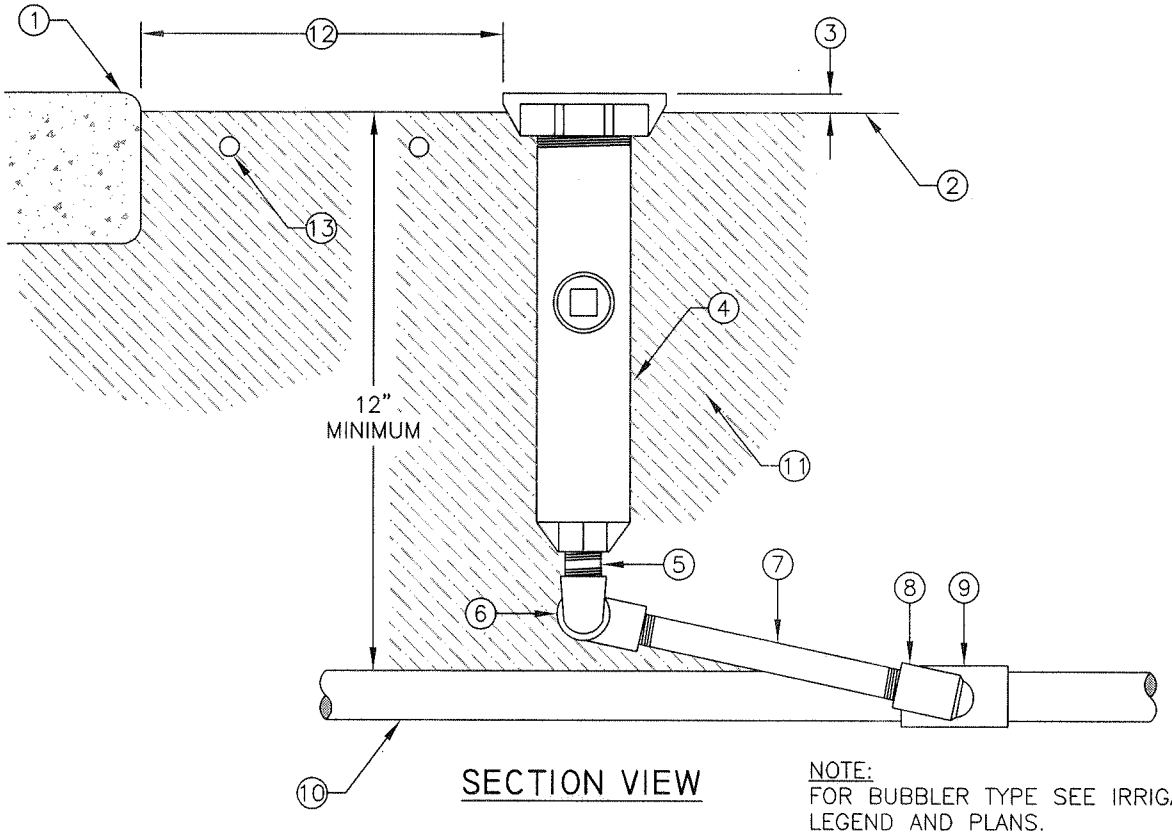

SECTION VIEW

NOTE:
FOR BUBBLER TYPE SEE IRRIGATION LEGEND AND PLANS.

REVISION	BY	DATE	APP. BY COUNCIL

CITY OF CHICO **STANDARD PLAN**

DRAWN BY: GL DATE: 9/09
CHECKED BY: DB SCALE: NONE
APPROVED: _____
CD&D DIRECTOR

SPRINKLER/BUBBLER POP-UP

NO. LS-17

SHEET 1 OF 1