


"V" SECTION

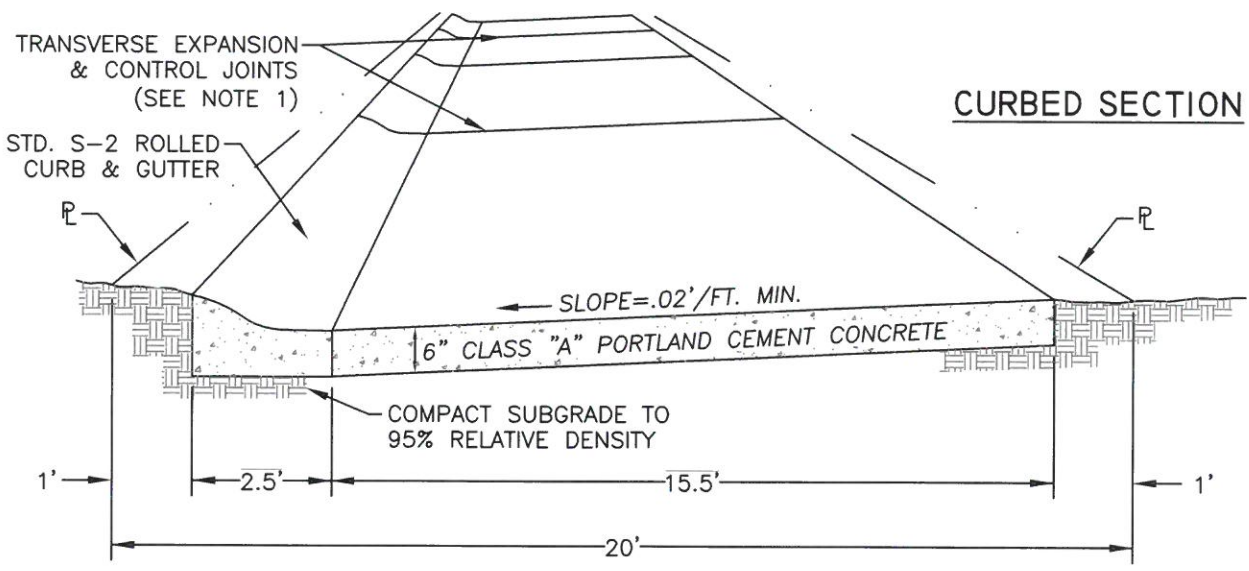

CURBED SECTION

NOTES:

1. INSTALL 1/4" WIDE TRANSVERSE EXPANSION JOINTS AT 48' INTERVALS AND 1/8" TRANSVERSE SCORED CONTROL JOINTS AT 12' INTERVALS.
2. ALL EXPANSION JOINTS AND THE FINISHING OF THE CONCRETE SURFACE SHALL BE DONE IN ACCORDANCE WITH STATE OF CALIFORNIA, DEPARTMENT OF TRANSPORTATION STANDARD SPECIFICATION.
3. DIMENSIONS SHOWN ARE PRESENT MINIMUM STANDARDS. DIMENSIONS OF ALLEY RIGHTS OF WAY EXISTING PRIOR TO ADOPTION OF MINIMUM STANDARDS MAY VARY. CONSTRUCT TO THE WIDTH AND ALIGNMENT SHOWN ON THE IMPROVEMENT PLANS.
4. THE CURBED SECTION SHALL BE USED WHEN SANITARY SEWER FACILITIES ARE AT THE CENTERLINE OF THE ALLEY.

| | | | |
|----------|----|------|---------|
| REVISION | BY | DATE | APP. BY |
| | | | |
| | | | |
| | | | |

CITY OF CHICO

STANDARD PLAN

DRAWN BY: GL DATE: 02/2016
 CHECKED BY: BO SCALE: NONE
 APPROVED: [Signature]
 PUBLIC WORKS DIRECTOR-ENGINEERING

ALLEY PAVEMENT

NO. **S-19**

SHEET 1 OF 1