



8B

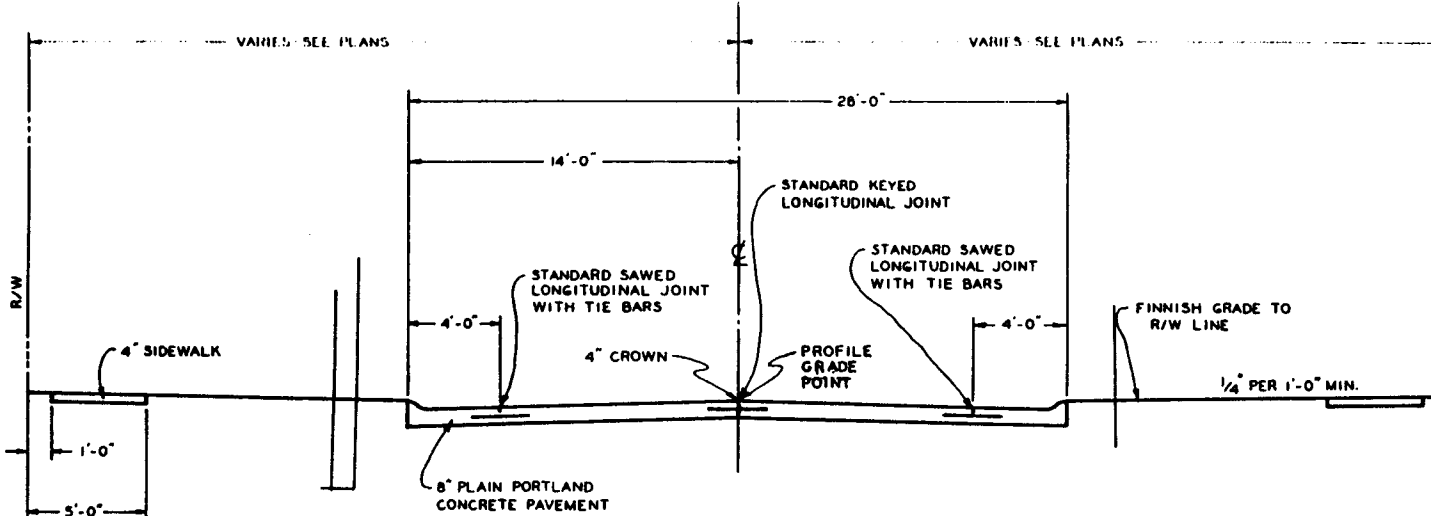


NOTE: AGGREGATE SUBBASE OF ODOT ITEM 310 SHALL BE USED UNDER NEW PAVEMENT. AGGREGATE SHALL BE 3'-5' IN DEPTH DEPENDING ON EXISTING SOIL CONDITIONS

TYPICAL SECTION - 28' CONCRETE PAVEMENT

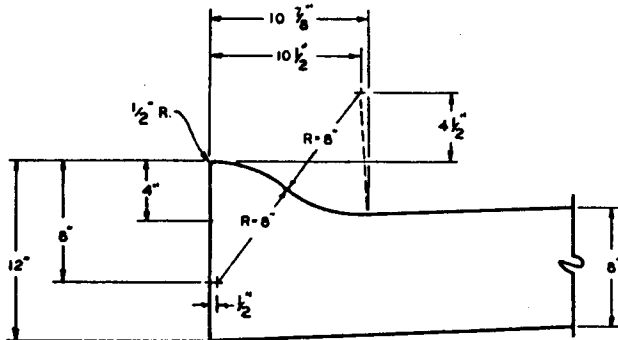

DETAIL OF 4" ROLL TYPE INTEGRAL CURB

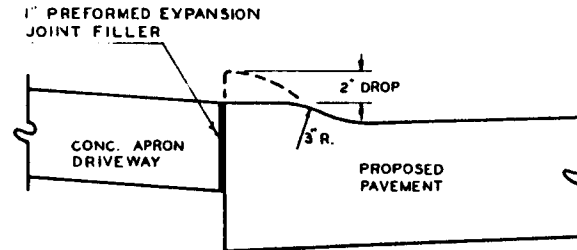

DETAIL OF DROP CURB FOR DRIVE APRON

\* DROP CURB MAY BE INSTALLED FOR FUTURE DRIVEWAYS AND SHALL BE INSTALLED FOR EXISTING DRIVEWAYS.

NOTE: DROP CURB SURFACE SHALL SLOPE AT 1:12 BETWEEN BACK OF CURB AND 3" ROUNDING

28' PAVEMENT CROWN TEMPLATE COORDINATES															
DISTANCE FROM $\xi$ FT.	0	1	2	3	4	5	6	7	8	9	10	11	12	13	14
DROP IN.	0	$\frac{1}{32}$	$\frac{3}{32}$	$\frac{3}{16}$	$\frac{5}{16}$	$\frac{1}{2}$	$\frac{23}{32}$	1	$1 \frac{5}{16}$	$1 \frac{21}{32}$	$2 \frac{1}{32}$	$2 \frac{15}{32}$	$2 \frac{15}{16}$	$3 \frac{7}{16}$	4

CITY OF ELYRIA, OHIO ENGINEERING DEPARTMENT	
STANDARD CONCRETE PAVEMENT DETAILS	
DR. BY L.A.G.	DATE
CK. BY <i>L.A.G.</i>	DATE 7-18-97
BY DATE	
APPROVED CITY ENGINEER	
DRAWING 1-101	

REVISIONS	