



GENERAL NOTES


1. Riprap ditch check dams shall be spaced such that the top of the downstream check dam is at the same elevation as the toe of the adjacent upstream check dam.
2. The volume of coarse aggregate #5 is $1/27 [a + 3 (b + c)]$, cys.
3. The area of geotextile fabric is $1/9 [12 + 21 (b + c)]$, sq. yds.

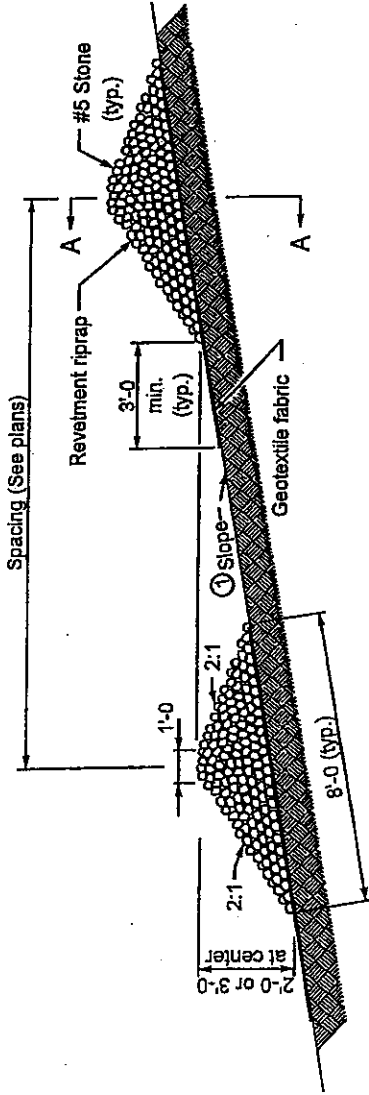

ELEVATION

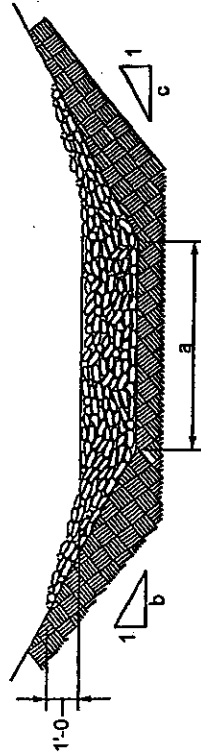

SECTION A-A

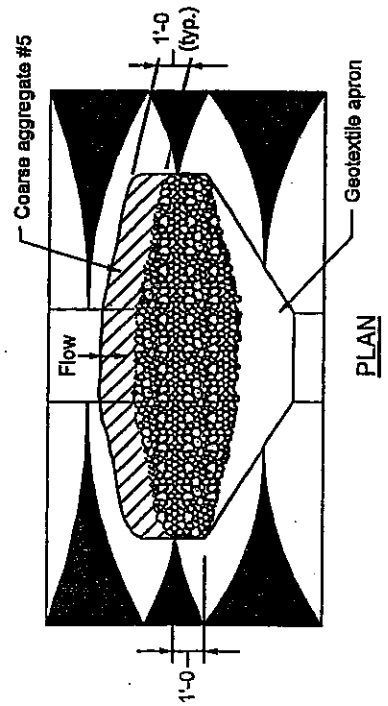

PLAN

INDIANA DEPARTMENT OF TRANSPORTATION	
TEMPORARY CHECK DAM, REVTMENT RIPRAP	
MARCH 2003	
STANDARD DRAWING NO. E 205-TECD-01	
1/1 Richard L. Vogelsang DESIGN STANDARD ENGINEER	3-03-03 DATE
1/1 Richard K. Smedley CHIEF HIGHWAY ENGINEER	3-03-03 DATE